



0800 SERIES

95LBS



FEATURES

KINGPIN: 5/16" rivet
RACEWAY: 3/16" diameter single race; hardened steel load bearings
BUSHING: Nylon, precision, steel or ball bearings
AXLE&NUT: 1/4" riveted axle

FINISH: Corrosion resistant bright zinc finish
HARDENED: Yoke and washers
SPECIAL: Wide selection of specialty stems and plates
LEG SPACING: 1"



EXCELLENT FOR:

- Office furniture
- Institutional equipment
- Hospital environment

OPTIONS:

- TLB Top Locking Brake (3" swivel only)
- SLB Side Locking Brake (SLB will not work with BB or PB)
- AN Axle and Nut
- C Raceway Seal (not avail. w/HW)
- BB Ball Bearings (2" and 2 1/2" Urethane Tapered Wheel Only)
- PB Precision Bearing (Ice Wheel Only)
- TG Thread Guards (2 1/2" and 3")

FINISHES:

- 08?A Antique
 - 08?N Nickel
 - 08?1 Brass
 - 08?2 Chrome
 - 08?4 Black
- Inquiries on other finishes welcome

WHEEL		CASTER				PART NUMBER								
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)				
2"	7/8"	75	Plain	1 3/4"	2 5/8"	ProTech™ Flat	S0803-***-PROF	0.35	R0803-***-PROF	0.25				
		80	Steel			Conductive Soft Rubber	S0803-***-CSR	0.41	R0803-***-CSR	0.30				
		80	Precision			ICE™	S0803-***-ICE-PB	0.45	R0803-***-ICE-PB	0.35				
		80	Steel			Soft Rubber	S0803-***-SR	0.41	R0803-***-SR	0.30				
		80	Steel			Soft Rubber Grey	S0803-***-SRG	0.41	R0803-***-SRG	0.30				
		95	Plain			Polyolefin	S0803-***-PO	0.34	R0803-***-PO	0.24				
		95	Plain			Semi Steel	S0803-***-ST	0.79	R0803-***-ST	0.68				
		95	Nylon			Envirothane™	S0803-***-U	0.41	R0803-***-U	0.30				
		95	Nylon			Envirothane™ Grey	S0803-***-UG	0.41	R0803-***-UG	0.30				
		95	Nylon			Envirothane™ Tapered	S0803-***-UT	0.38	R0803-***-UT	0.27				
		95	Ball			Envirothane™ Tapered BB	S0803-***-UT-BB	0.51	R0803-***-UT-BB	0.40				
		2 1/2"	7/8"			75	Plain	2 1/8"	3 3/16"	ProTech™ Flat	S0823-***-PROF	0.41	R0823-***-PROF	0.31
80	Nylon			Conductive Soft Rubber	S0823-***-CSR	0.51	R0823-***-CSR			0.41				
80	Precision			ICE™	S0823-***-ICE-PB	0.47	R0823-***-ICE-PB			0.37				
80	Nylon			Soft Rubber	S0823-***-SR	0.51	R0823-***-SR			0.41				
95	Plain			Polyolefin	S0823-***-PO	0.51	R0823-***-PO			0.32				
95	Nylon			Envirothane™	S0823-***-U	0.46	R0823-***-U			0.36				
95	Nylon			Envirothane™ Grey	S0823-***-UG	0.46	R0823-***-UG			0.36				
95	Nylon			Envirothane™ Tapered	S0823-***-UT	0.47	R0823-***-UT			0.37				
95	Ball			Envirothane™ Tapered BB	S0823-***-UT-BB	0.58	R0823-***-UT-BB			0.48				
3"	7/8"			75	Plain	2 3/8"	3 11/16"			ProTech™ Flat	S0833-***-PROF	0.48	R0833-***-PROF	0.36
				95	Steel					Conductive Soft Rubber	S0833-***-CSR	0.62	R0833-***-CSR	0.50
				95	Precision					ICE™	S0833-***-ICE-PB	0.59	R0833-***-ICE-PB	0.47
		95	Plain	Polyolefin	S0833-***-PO			0.48	R0833-***-PO	0.36				
		95	Steel	Soft Rubber	S0833-***-SR			0.62	R0833-***-SR	0.50				
		95	Steel	Soft Rubber Grey	S0833-***-SRG			0.62	R0833-***-SRG	0.50				
		95	Nylon	Envirothane™	S0833-***-U			0.54	R0833-***-U	0.42				
		95	Nylon	Envirothane™ Grey	S0833-***-UG			0.54	R0833-***-UG	0.42				

* Caster weight based on Standard Plate

SPECIAL:









Urethane wheels are hard enough for carpeted floors and soft enough for tiled floors

BIFMA approved

STANDARD PLATE: A17D

Plate Thickness: 3/32"

PLATE DIAGRAMS

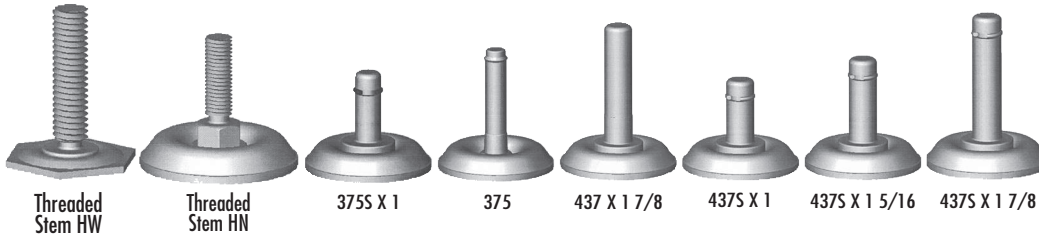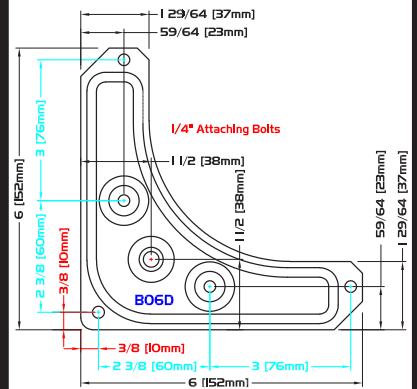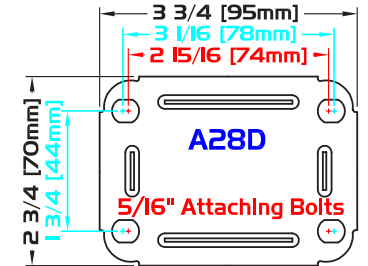

THREADED STEMS HEX WASHER

***	DIAMETER	LENGTH	TYPE
5/16-18X13/16HW	5/16"	13/16"	NC
5/16-18X1HW	5/16"	1"	NC
3/8-16X1/2HW	3/8"	1/2"	NC
3/8-16X3/4HW	3/8"	3/4"	NC
3/8-16X1HW	3/8"	1"	NC
3/8-16X1 1/2HW	3/8"	1 1/2"	NC

THREADED STEMS HEX NUT

***	DIAMETER	LENGTH	TYPE
5/16-18X3/4HN	5/16"	3/4"	NC
5/16-18X1HN	5/16"	1"	NC
3/8-16X5/8HN	3/8"	5/8"	NC
3/8-16X1HN	3/8"	1"	NC
3/8-16X1 1/2HN	3/8"	1 1/2"	NC

ICE WHEEL COLOURS

+Actual colours may vary

COLOUR	PART NUMBER	SIZE AVAILABILITY
CLEAR	ICE	2" * 2 5/16" * 3"
BLUE	ICEB	2" * 2 5/16" * 3"
BLACK	ICEBL	2"
GREEN*	ICEG*	2" * 2 5/16" * 3"
ORANGE*	ICEO*	3"
PURPLE*	ICEP*	3"
PINK	ICEPI	3"
RED*	ICER*	2" * 2 5/16" * 3"

ROUND STEMS

***	DIAMETER	LENGTH	TYPE
375SX1	3/8"	1"	Friction Ring
375	5/16"	1 9/16"	Grip Neck
437X1 7/8	7/16"	1 7/8"	Plain
437SX1	7/16"	1"	Friction Ring
437SX1 5/16	7/16"	1 5/16"	Friction Ring
437SX1 7/8	7/16"	1 7/8"	Friction Ring

* Custom order run 2,500 pieces minimum. Call for availability