


# Pneumatic Lift & Rotate

## Pneumatic Scissor Lift & Rotate

Raise loads to a comfortable height and rotate them with the integrated turntable for loading, unloading or working on the side nearest the operator.

### Features

- Standard pedestal control, foot control optional
- Pressure relief valve standard
- Lifetime warranty on actuator
- Air requirements: 80 psi at 15 cfm

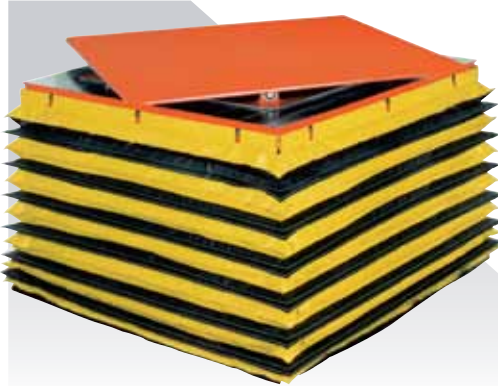

Shown with optional bellows skirting



Model Number	Load Capacity	Raised Height	Lowered Height	Vertical Travel	Base Size W x L	Platform Size W x L	Shipping Weight
<b>AXR10 Series</b>							
AXR10-3648	1000 lbs	32"	11"	21"	36 x 48"	36 x 48"	1055 lbs
AXR10-4848	1000 lbs	32"	11"	21"	36 x 48"	48 x 48"	1185 lbs
AXR10-4856	1000 lbs	32"	11"	21"	36 x 48"	48 x 56"	1280 lbs
AXR10-4860	1000 lbs	32"	11"	21"	36 x 48"	48 x 60"	1320 lbs
<b>AXR20 Series</b>							
AXR20-3648	2000 lbs	35"	11"	24"	36 x 48"	36 x 48"	1155 lbs
AXR20-4848	2000 lbs	35"	11"	24"	36 x 48"	48 x 48"	1295 lbs
AXR20-4856	2000 lbs	35"	11"	24"	36 x 48"	48 x 56"	1385 lbs
AXR20-4860	2000 lbs	35"	11"	24"	36 x 48"	48 x 60"	1450 lbs
<b>AXR40 Series</b>							
AXR40-4848	4000 lbs	35"	11"	24"	48 x 48"	48 x 48"	1420 lbs
AXR40-4856	4000 lbs	35"	11"	24"	48 x 48"	48 x 56"	1550 lbs
AXR40-4860	4000 lbs	35"	11"	24"	48 x 48"	48 x 60"	1595 lbs

## Heavy-Duty Pneumatic Scissor Lift & Rotate

Extra capacity to handle loads up to 8,000 lbs. Turntable fabricated from 1/2" steel plate.

Model Number	Load Capacity	Raised Height	Lowered Height	Vertical Travel	Base Size W x L	Platform Size W x L	Shipping Weight
<b>AXSR20 Series</b>							
AXSR20-3648	2000 lbs	39"	15"	24"	36 x 48"	36 x 48"	1155 lbs
AXSR20-4848	2000 lbs	39"	15"	24"	36 x 48"	48 x 48"	1295 lbs
AXSR20-4856	2000 lbs	39"	15"	24"	36 x 48"	48 x 56"	1385 lbs
AXSR20-4860	2000 lbs	39"	15"	24"	36 x 48"	48 x 60"	1450 lbs
<b>AXSR40 Series</b>							
AXSR40-3648	4000 lbs	39"	15"	24"	36 x 48"	36 x 48"	1370 lbs
AXSR40-4848	4000 lbs	39"	15"	24"	36 x 48"	48 x 48"	1420 lbs
AXSR40-4856	4000 lbs	39"	15"	24"	36 x 48"	48 x 56"	1550 lbs
AXSR40-4860	4000 lbs	39"	15"	24"	36 x 48"	48 x 60"	1595 lbs
<b>AXSR60 Series</b>							
AXSR60-4848	6000 lbs	39"	15"	24"	48 x 48"	48 x 48"	1620 lbs
AXSR60-4856	6000 lbs	39"	15"	24"	48 x 48"	48 x 56"	1750 lbs
AXSR60-4860	6000 lbs	39"	15"	24"	48 x 48"	48 x 60"	1795 lbs
<b>AXSR80 Series</b>							
AXSR80-4848	8000 lbs	39"	15"	24"	48 x 48"	48 x 48"	1720 lbs
AXSR80-4856	8000 lbs	39"	15"	24"	48 x 48"	48 x 56"	1850 lbs
AXSR80-4860	8000 lbs	39"	15"	24"	48 x 48"	48 x 60"	1895 lbs

## Pneumatic Mechanical Options

**Oversized Platforms** - can be increased in width and length up to an additional 24". Side and end-load capacities are de-rated 2% per inch of increase and oversized models must be lagged to the floor.

**Platform with Beveled Edges** - welded at 30° angles, beveled edges increase the standard platform by 4" on all sides.

**Optional Platforms & Overlay Material** - for special handling of loads: V-cradle tops, stainless steel, diamond plate, and UHMV

**Lifting Eyes** - for installation and transportation of unit with a sling or lifting chain.

**Accordion (Bellows) Skirts** - vinyl, alternating black & yellow 3" pleats. Encloses the base and leg assembly. AX10, AX20, AXR10, AXR20, AXS20, AXS40, AXSR20, AXSR40, AX40, AXR40, AXS60, AXS80, AXSR60, AXSR80, AT10, AT20, AT40, AXT10, AXT20, AXST20, AXST40, AXT40, AXST60, AXST80. Other models, please contact Sales.

**Portable / Semi Live Arrangement** - includes two fixed 5" wheels on one end/ side (specify side or end mount) and a pull plate with wheeled dolly handle on the opposite end/side of the base frame. For moving lifts when empty. AXS20, AXS40, AXS60. Models with oversized platforms. Tilt and Lift & Tilt models. Other models, please contact Sales.

**V-Grooved Wheels** - 5" steel wheels for transportable units only, sold per pair.

**Transportable Units** - two rigid and two swivel casters with 6" diameter steel or texite wheels and one Presto heavy-duty foot operated floor lock. This option adds between 5" and 10-1/4" to the lowered and raised elevations (depending on the positioning of the casters). AXS20, AXS40, AXS60. Models with oversized platforms. Tilt and Lift & Tilt models. Other models, please contact Sales.

**Removable Push Handle**

**Fork Pockets** - 6" x 3" or 8" x 3" enclosed steel tube. Specify fork spread. Adds 3" to the lowered/raised elevations when mounted under the base frame. AXS Heavy Duty series lifts only. Tilt and Lift & Tilt models, contact Sales.

**Floor Stands** - increase the lowered height of filters. Specify desired elevation.

**Motion Stabilizer** - reduces the bounce found in pneumatic tilt tables.

**Turntable Options for AXR and AXSR Series Lifts**

90° or 180° spring position detents

90° positive locking positioner

Turret-style bearing is available for heavier loads and larger sizes

Foot Controlled Pneumatic Valve (in place of standard pedestal mounted valve)

AT, AX, AXR, AXS, & AXSR series

AXT and AXST Dual Foot Controls