

ABOUT US

At Malta Dynamics, we have the unique privilege of having crews in the field who actively test and use our safety equipment before we put products on the market. These field testers provide their honest opinions and feedback to help make our products as efficient and user-friendly as possible. Within this catalog you will find state-of-the-art safety products that have been meticulously designed with you in mind. We engineer, manufacture, and personally use all our safety and fall protection solutions, so when suggestions are given to us, we have the resources to modify and perfect our designs. Nobody else does safety like Malta Dynamics. We know that every jobsite may have a specific set of fall hazards to face, and we put effort into making sure the equipment we offer has been approved by the people who utilize our products most.

We trust your opinion, so you can trust our gear!



NEW PRODUCTS

SAFETY HELMETS - Pg. 40



The Malta Dynamics Type 2 Safety Helmets meet the ANSI standard Z89.1-2014 for Type 2 Class C Helmets.

WORK GLOVES - Pg. 47



Comfortable, lightweight and durable cut resistant gloves are critical to maintaining safety in any work environment. Malta Dynamics made the work gloves that our crews asked for.

X250 - Pg. 6



The X250 provides fixed overhead fall protection for two workers in fall arrest to eliminate foot level tie-off, and uses its length and a removable weight box to counterbalance the anchorage support for the user operating over the edge.

EDGE GRABBER/ENGINEERED DAVIT ANCHORS	06
HUNTER'S ELITE	08
RENTALS	10
SAFETY HARNESSES	12
HARNESS ACCESSORIES	16
SELF-RETRACTING LIFELINES	18
LANYARDS	24
VERTICAL LIFELINE ASSEMBLIES	26
CONNECTOR HARDWARE	28
ANCHORS	30
BEAM STANCHIONS	36
RESCUE EQUIPMENT	38
PPE	40
GUARDRAIL/KITS	50

04

XSERIES MOBILE GRABBER ...

RESOURCES

51

MALTA DYNAMICS XSERIES MOBILE GRABBER

The World Leader in Mobile Fall Protection.

Engineered and tested to provide fall protection anchorage in difficult spots, our line of XSERIES towable anchors is trusted and utilized around the world to keep workers safe. Custom configurations are available.



8'3" (2.5m)

5'9" (1.8m)

10'9" (3.3m)

20'10" (6.4m)

10'4" (3.1m)

310 lbs.








Model	X1000	X1000E
Safety Standards		
	OSHA Fall Arrest Standards	
Applicable	Fall Arrest Standards set forth in A	NSI Z359.6
General		
Weight	2200 lbs.	2900 lbs.
Max. Working Height	22' (6.7m)	22' (6.7m)
Min. Working Height	17' (5.18m)	17' (5.18m)
Max. Folded Height	7'10" (2.38m)	7'10" (2.38m)
Frame Width	5'8" (1.73m)	5'8" (1.73m)
Overall Length	9'7" (2.92m)	9'7" (2.92m)
Max. Arm Reach Out	3" (.91m)	3" (.91m)
Max. Anchor Point capacity	310 lbs.	310 lbs.
Max. Allowable Users	2	2
Fluid Capacity	-	12.5 Gallons





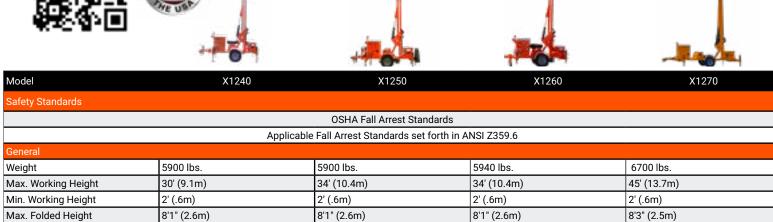

5'9" (1.8m)

5'9" (1.8m)

15'6" (4.7m)

9'9.5" (3m)

310 lbs.

8'1" (2.6m)


5'9" (1.8m)

5'9" (1.8m)

15'6" (4.7m)

9'9.5" (3m)

310 lbs.

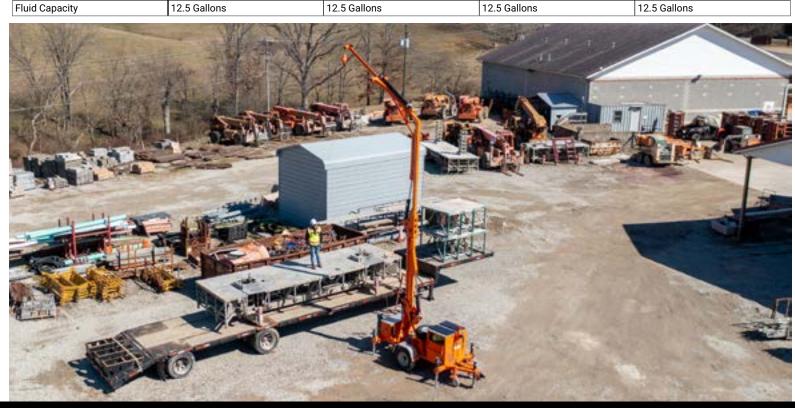



8'1" (2.6m)

5'9" (1.8m)

5'9" (1.8m)

15'6" (4.7m)

4'5.5" (1.4m)

310 lbs.

Frame Width

Overall Length Max. Arm Reach Out

Working Frame Width

Max. Allowable Users

Max. Anchor Point capacity

MALTA DYNAMICS EDGE GRABBER

Ideal Selection for Fall Protection over Flat Rooftops.

MALTA DYNAMICS ENGINEERED DAVIT ANCHORS

Portable or Permanent, Classic Proven Design









odel X250	
Safety Standards	
OSHA Fall Arr	rest Standards
Applicable Fall Arrest Stand	ards set forth in ANSI Z359.6
General	
Weight	2320 lbs.
Frame Width	5'6" (1.7m)
Working Frame Width	8' (2.4m)
Overall Length	13' (4m)
Max. Arm Reach Out	6'3" (1.9m)
Max. Anchor Point capacity	310 lbs.
Max. Allowable Users	2














Model	X500	X525	X550
Safety Standards			
	OSHA Fa	all Arrest Standards	
	Applicable Fall Arrest S	Standards set forth in ANSI Z3	59.6
General			
Weight	5950 lbs.	1784 lbs.	2271 lbs.
Max. Working Height	20' (6.7m)	25' (7.6m)	22' (6.7m)
Frame Width	6' 3" (1.9m)	3' (.9m)	7'5" (2.3m)
Overall Length	13' (4m)	11' 1" (3.4m)	11' 3" (3.4m)
Max. Arm Reach Out	10' (3m)	9'7" (2.92m)	7'6" (2.3m)
Max. Anchor Point capacity	310 lbs.	310 lbs.	310 lbs.
Max. Allowable Users	1	1	1

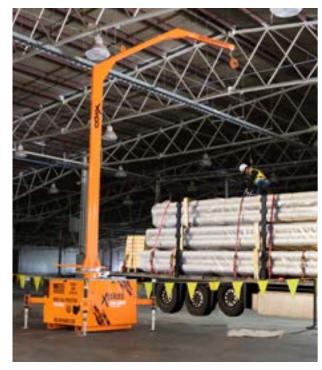





MALTA DYNAMICS HUNTER'S ELITE

Tree stand safety you can trust and wear all day.

We've taken our expertise in Fall Protection and applied it to our passion of hunting. The Hunter's Elite line represents the most premium and comfortable treestand safety products on the market.



HUNTER'S ELITE HUNTING HARNESS KIT







KEY FEATURES:

- Lumbar Support Belt Included
- Shock Absorbing Tether Attached
- Sewn-in Lineman's Climbing Strap Loops
- MOLLE Webbing on Back of Lumbar Support for Bag Attachment
- Two Built-in Gear Lanyards
- Quick Connect Chest and Leg Buckles for Fast and Easy Adjustments

PART #	PATTERN	SIZE	WEIGH
HE2200	Kanati	S-M	4.6 lbs.
HE2201	Kanati	L-XL	4.7 lbs.
HE2202	Kanati	2XL	4.8 lbs.
HE2203	Kanati	3XL	4.9 lbs.
HE3200	Strata	S-M	4.6 lbs.
HE3201	Strata	L-XL	4.7 lbs.
HE3202	Strata	2XL	4.8 lbs.
HE3203	Strata	3XL	4.9 lbs.

The Hunter's Elite Harness from Malta Dynamics is crafted with the avid hunter in mind. This harness features Strata or Kanati camouflage pattern options from TrueTimber. To keep you comfortable and quiet for hours, this harness has been fitted with silent padding on the shoulders, legs, back, and waist. The buckles on the Hunter's Elite stay silent while you move because we've incorporated elastic band coverings for the metal components to eliminate noise.

PRODUCT SPECIFICATIONS:

- Max User Weight Capacity: 300 lbs.
- Materials: Nylon, Polyester & Steel
- Kit Includes: Tree Strap, Lineman's Climbing Strap, & Deer Drag/Suspension Relief Strap



HUNTER'S ELITE ULTRALIGHT HARNESS KIT





- Shock Absorbing Tether Attached
- Sewn-in Lineman's Climbing Strap Loops
- Two Built-in Gear Lanyards
- Quick Connect Chest and Leg Buckles for Fast and Easy Adjustments
- Ultralight-Weight

The Hunter's Elite Ultralight is the safety harness you don't notice you have on. The minimalistic design still features premium breathable padding on the back, shoulders, and legs, with 1" webbing, connected by aluminum quick-connect buckles.



PRODUCT SPECIFICATIONS:

- Max User Weight Capacity: 300 lbs.
- Materials: Nylon, Polyester & Steel
- Kit Includes: Tree Strap, Lineman's Climbing Strap, & Deer Drag/Suspension Relief Strap



HUNTING VERTICAL LIFELINE ASSEMBLY



KEY FEATURES:

- Reflective material that lights up with the slightest beam of light.
- Accommodate stands up to 25 feet
- Includes carabiner

HEA1000 30'

■ Pre-installed prusik knot

The 30' Hunting Vertical Lifeline features reflective material that shines with the slightest beam to locate your stand in low-light conditions. All hunting lifelines come with a carabiner. Once installed properly, the lifeline keeps you connected from the ground to the stand and back again.

PRODUCT SPECIFICATIONS:







HUNTER'S ELITE HARNESS ACCESSORIES



We have all the accessories needed to complete your kit; lineman's climbing strap, tree strap, and deer drag/suspension relief strap, all expertly crafted to stand up to provide safety and stealth. All of these accessories should be used together to make sure all your stands are equally protected.


WEIGHT

12.4 lbs.












PART#	ACCESSORY	WEIGHT
HEA1000	Tree Strap	.6 lbs.
HEA2000	Lineman's Climbing Strap	1.5 lbs.
HEA3000	Deer Drag/Suspension Relief Strap	.3 lbs.

MALTA DYNAMICS RENTAL PROGRAM

When an unexpected or temporary need for fall protection arises, Malta Dynamics can help.

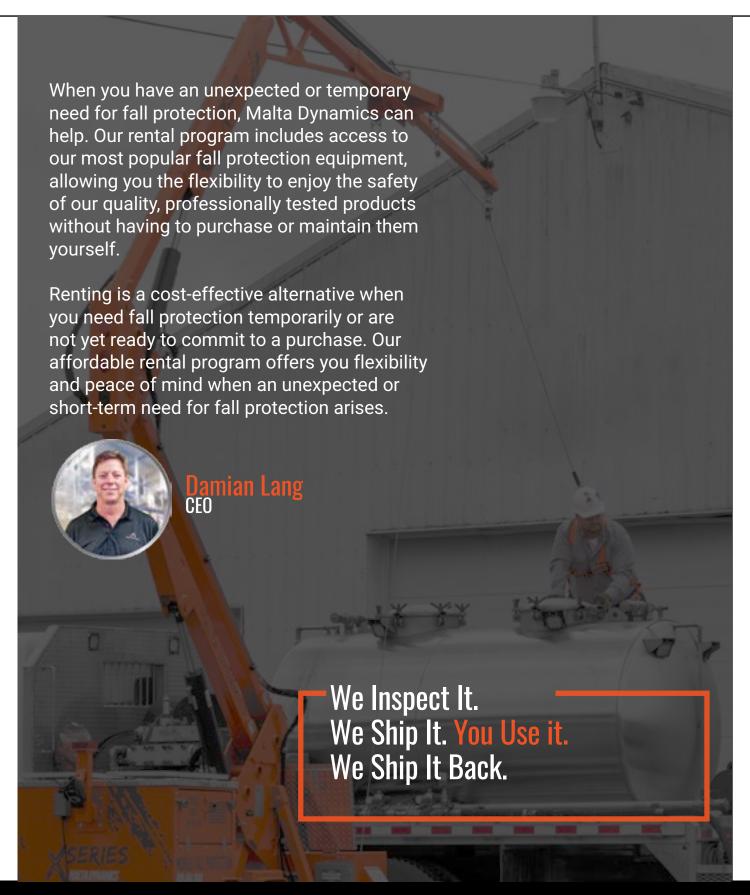

RENTALS MADE EASY



BENEFITS OF RENTING

- Quick access to fall protection to remain compliant with OSHA standards
- Save money over purchasing
- Receive equipment that has been pre-inspected and is ready to use immediately
- Rentals may qualify as a deductible operating expense
- No commitment—keep your equipment as long as you need it and return it when finished
- Guarantee that all equipment is professionally tested and maintained

PRICING

Pricing for rentals is based on how long you keep the equipment to use. We begin your rental fee from the day the product reaches the shipping location you specify. Your rental charges stop on the day the equipment is returned to Malta Dynamics.

MORE INFORMATION



Please contact us with questions or for more information about our rental program. We look forward to answering your questions and helping you with your fall protection needs.



MALTA DYNAMICS SAFETY HARNESSES

Protect Your Valued Workers With Malta Dynamics' Cutting-Edge Full Body Harnesses

Malta Dynamics offers a wide variety of harnesses that include D-ring configurations for all applications, including fall arrest, positioning, fixed ladders, and confined-space rescue, entry, and retrieval.

KEY FEATURES:

■ D-Rings: Back

■ Fall Indicator


■ Break Away Lanyard Keepers

■ Finished Webbing Ends



MALTA DYNAMICS HARNESS SIZING CHART

Belt Size	Waist Measurement
S-M	22" - 46"
L-XL	26" - 49"
2XL	30" - 52"
3XL	30" - 53"

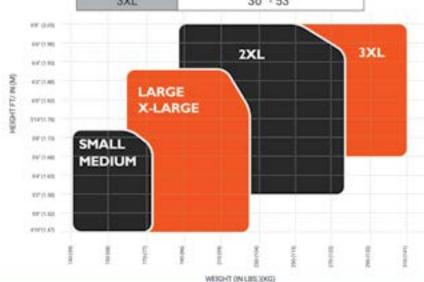




WARTHOG TONGUE & BUCKLE HARNESS







The Warthog Full-Body Harness with Tongue Buckle Legs is the best available economy harness on the market. Because the Warthog Safety Harness is constructed with a one-piece structure, you can trust it will stay in place without slipping. It features leg connections that can be easily adjusted and tightened to help you achieve the perfect fit.

PRODUCT SPECIFICATIONS:

- ANSI Capacity Range: 130-310 lbs
- Static Strength: 3,600 lbs.
- Materials: Nylon, Polyester & Steel



WARTHOG TONGUE & BUCKLE W/X-PAD









KEY FEATURES:

- D-Rings: Back
- Removable Back Pad
- Break Away Lanyard Keepers
- Fall Indicator
- Finished Webbing Ends

PART #	SIZE	WEIGHT
B2006-X	S-M	3.9 lbs.
B2002-X	L-XL	3.9 lbs.
B2003-X	2XL	4 lbs.
B2004-X	3XL	4 lbs.

The Malta Dynamics Warthog Full-Body Harness comes with the special X-Pad as a standard accessory. The X-Pad Back Pad is a great comfort accessory for your harness, enhancing worker satisfaction, productivity and compliance. The X-Pad provides extra comfort throughout the neck, shoulders and back.

PRODUCT SPECIFICATIONS:

- ANSI Capacity Range: 130-310 lbs
- Static Strength: 3,600 lbs.
- Materials: Nylon, Polyester & Steel



WARTHOG PASS-THRU HARNESS





KEY FEATURES:

- D-Rings: Back
- Break Away Lanyard Keepers

SIZE

S-M

L-XL

2XL

3XL

■ Fall Indicator

PART #

B2007

B2000

B2001

B2005

■ Finished Webbing Ends

The Malta Dynamics Warthog Full-Body Harness with Pass-Thru Leg Buckles is the best available economy harness on the market. You'll get functional and efficient features at an affordable rate.

PRODUCT SPECIFICATIONS:

WEIGH

2.7 lbs.

2.8 lbs.

3 lbs.

WWW.BANDCIP.COM // 888-276-3386

3.3 lbs.

- ANSI Capacity Range: 130-310 lbs
- Static Strength: 3,600 lbs.
- Materials: Polyester and Steel



WARTHOG SIDE D-RING HARNESS









KEY FEATURES:

- D-Rings: Back & Sides
- Break Away Lanyard Keepers
- Fall Indicator
- Finished Webbing Ends

The Warthog Full-Body Universal Harness with Side D-Rings — you can feel confident working at elevated heights with positioning devices (C7900 - Rebar Chain Assembly). It features leg connections that can be easily adjusted and tightened to help you achieve the perfect fit.

PART#	SIZE	WEIGHT
B1101	S-M	4 lbs.
B1102	L-XL	4 lbs.
B1103	2XL	4.1 lbs.

- ANSI Capacity Range: 130-310 lb
- Static Strength: 3,600 lbs.
- Materials: Polyester and Steel





MALTA DYNAMICS SAFETY HARNESSES

Protect Your Valued Workers With Malta Dynamics' Cutting-Edge Full Body Harnesses

Malta Dynamics offers a wide variety of harnesses that include D-ring configurations for all applications, including fall arrest, positioning, fixed ladders, and confined-space rescue, entry, and retrieval.



WARTHOG MAXX SIDE D-RING HARNESS



KEY FEATURES:

- D-Rings: Back & Sides
- Quick-Connect Chest Buckle
- Break Away Lanyard Keepers
- Waist Belt
- Finished Webbing Ends

PART#	SIZE	WEIGH
B2101	S-M	5 lbs
B2102	L-XL	5.1 lbs
B2103	2XL	5.2 lbs
B2104	3XL	5.4 lbs

The Warthog® MAXX Construction Full Body Harness is designed to help protect workers in heavy duty trades. With features like additional adjustability, a padded waist belt, side positioning D-Rings, and quick disconnect chest buckle, it's easy to see why it is the most cost effective harness of its class.

PRODUCT SPECIFICATIONS:

- ANSI Capacity Range: 130-310 lbs.
- Static Strength: 3,600 lbs.
- Materials: Nylon, Polyester & Steel



COMFORT MAXX HARNESS



KEY FEATURES:

- D-Rings: Back & Sides
- Quick-Connect Chest & Leg Buckles
- Break Away Lanyard Keepers
- Fall Indicator
- Finished Webbing Ends

PART #	SIZE	WEIGHT
B2201	S-M	6 lbs.
B2202	L-XL	6.1 lbs.
B2203	2XL	6.3 lbs.
B2204	3XL	6.44 lbs.

The Warthog® MAXX "Comfort" Construction Harness with Removable Belt, Side D-Rings and additional Padding combines 100% safety compliance with the ultimate in comfort - padding on the shoulders, back, waist and legs.

PRODUCT SPECIFICATIONS:

- ANSI Capacity Range: 130-310 lbs.
- Static Strength: 3,600 lbs.
- Materials: Nylon, Polyester & Steel



COMFORT MAXX STEEL HARNESS



KEY FEATURES:

- D-Rings: Back & Sides
- Quick-Connect Chest & Leg Buckles
- Sewn in lumbar support
- Custom standing D-Ring
- Trauma Relief Strap Included

PART #	SIZE	WEIGHT
B3201	S-M	6.8 lbs.
B3202	L-XL	6.9 lbs.
B3203	2XL	7 lbs.
B3204	3XL	7.1 lbs.

WWW.BANDCIP.COM // 888-276-3386

A steelworker inspired version of our best-selling Comfort Maxx, this all-new harness features upgrades to the belt so it better handles popular tool bags, a higher D-ring and dual lifeline attachment point to lessen strain on the lower back, and a pre-installed trauma relief strap. Combine these features with the comfort and durability of the original, and its own unique color-scheme, the Comfort Maxx Steel is sure to be a favorite for all industrie

PRODUCT SPECIFICATIONS:

- ANSI Capacity Range: 130-310 lbs
- Static Strength: 3,600 lbs.
- Materials: Nylon, Polyester & Steel



RAZORBACK ELITE STERNAL





KEY FEATURES:

PART#

B4000

B4001

B4002

B4003

- D-Rings: Sternal, Back & Sides
- Built-In Rescue Handles
- Quick-Connect Buckles
- All Al

■ Light

2XL

3XL

luminum	n Hardware		
tweight,	Breathable		
	SIZE	WEIGHT	PRODUCT SPECIFICA
	S-M	3.3 lbs.	■ ANSI Capacity Ra
	L-XL	3.5 lbs.	Androapacity its


3.7 lbs.


3.9 lbs.

The Razorback Elite MAXX safety harness was designed to be one of the lightest weight safety harnesses

available with all of the features you need to work in any situation, including climbing via sternal D-Ring.

:ATIONS:





■ Materials: Nylon, Polyester & Aluminum



RAZORBACK ELITE MAXX STERNAL









KEY FEATURES:

- D-Rings: Sternal, Back & Sides
- Built-In Rescue Handles
- Ouick-Connect Buckles
- All Aluminum Hardware
- Sewn-In Waist Belt

PART#	SIZE	WEIGHT
B4200	S-M	4.7 lbs.
B4201	L-XL	4.9 lbs.
B4202	2XL	5 lbs.
B4203	3XL	5.2 lbs.

The Malta Dynamics Razorback Elite MAXX Sternal D-Ring Harness is designed to prepare your crew for any job at heights, including tower and fixed ladder climbing. This sternal D-Ring harness will deliver functionality and innovation with a lightweight design that makes it easy to wear all day on any job.

PRODUCT SPECIFICATIONS:

- ANSI Capacity Range: 130-310 lbs.
- Static Strength: 3,600 lbs.
- Materials: Nylon, Polyester & Aluminum



JAVELINA HARNESS





- D-Rings: Back
- Break Away Lanyard Keepers
- Quick-Connect Chest Buckle
- Tongue and Buckle Leg Buckles
- Aluminum Hardware

PART#	SIZE	WEIGHT
B4300	S-M	3.2 lbs.
B4301	L-XL	3.3 lbs.
B4302	2XL	3.4 lbs.
B4303	3XL	3.5 lbs.
B 1000	OXL	0.0 150.

The Javelina Full Body Harness has everything you need, and nothing you don't. All hardware and fabric are of highest quality. This harness blends basic functionality and high quality components.

- ANSI Capacity Range: 130-310 lbs
- Static Strength: 3,600 lbs.
- Materials: Polyester & Aluminum





MALTA DYNAMICS HARNESS ACCESSORIES

Make your harness more functional or comfortable.



HARNESS X-PAD



KEY FEATURES:

- Compact and lightweight design
- Easy attachment to harnesses with hook and loop fasteners
- "X" design fits all Malta Dynamics harnesses as well as many other makes and models
- Provides added comfort
- Easy removal for cleaning

PART#	WEIGH
B0001	.2 lbs.

The Malta Dynamics X-Pad is crafted with top quality high strength polyester to keep the padding comfortable, breathable, and durable. The X-Pad is easily put in place on your harness with the help of our heavy-duty hook and loop fasteners. Each pad can also be removed for cleaning or for transfer to another full body harness.



PRODUCT SPECIFICATIONS:

■ Materials: Polyester



HARNESS SHOULDER PADS (PAIR)



KEY FEATURES:

- Compact and lightweight design
- Provides added comfort
- Easy attachment to harnesses
- Adds next-level comfort to all Malta Dynamics harnesses
- Easy removal for cleaning
- Breathable design

The Harness Shoulder Pads are for attachment to a harness and operate in combination with the other parts of the system.

Upgrade your comfort on the jobsite with our cushioned



PART# WEIGHT

.3 lbs.

PRODUCT SPECIFICATIONS:

■ Materials: Polyester

leg pads.



HARNESS LEG PADS (PAIR)



KEY FEATURES:

B0002

- Compact and lightweight design
- Provides added comfort
- Easy attachment to harnesses
- Adds next-level comfort to all Malta Dynamics harnesses

WEIGH

2.4 lbs.

WWW.BANDCIP.COM // 888-276-3386

- Easy removal for cleaning
- Breathable design

PART #

B0003



PRODUCT SPECIFICATIONS:

■ Materials: Polyester



HARNESS WAIST BELT W/PAD



KEY FEATURES:

- Compact and lightweight design
- Provides added comfort
- Easy attachment to harnesses
- Adds next-level comfort to all Malta Dynamics harnesses
- Easy removal for cleaning
- Breathable design

PART#	SIZE	WEIGHT
B0004	S-M-L	.5 lbs.
B0005	XL-2XL	.8 lbs.

Add some stability and comfort to your basic harness with our padded waist belt.





■ Materials: Polyester and Steel

HARNESS WEBBING CLIPS (100 PACK)



KEY FEATURES:

- Compact and lightweight design
- Provides added comfort
- Easy attachment to harnesses
- Adds next-level comfort to all Malta Dynamics harnesses

Keep excess webbing straps out of the way, or replace your worn webbing clips with this pack.



PART#	WEIGHT
B0100	.1 lbs.

TOOL LANYARD



KEY FEATURES:

PART #

C1006

- Safety Green and Orange
- Helps reduce falling object related
- Securely attaches tools to harness, wrist, or tool belt
- Provides high visibility, ease of use, and versatility

weight, aluminum alloy screw lock mini carabiner for attachment to your harness or tool belt. This tool lanyard extends to 53" and sits in a relaxed position at 32". Tool lanyards prevent hand tools from becoming falling objects on the jobsite.

The Malta Dynamics Tool Lanyard features a light-

PRODUCT SPECIFICATIONS:

- Max. Tool Weight Support: 15 lbs.
- Screw Lock Carabiner: Aluminum Alloy
- Materials: 75" W-Tubular Polyester



17

WEIGHT

.2 lbs.

MALTA DYNAMICS LEADING EDGE SRLS

Protect yourself properly with lifelines designed and tested at below D-Ring anchorage.

Is your anchorage at or below your D-ring? Could your fall cause your SRL cable to come in contact with another object? If yes, Leading Edge rated devices are what your crew needs. Not sure? Call one of our experts at 1-800-494-1840



8' PERSONAL LEADING EDGE SRL







- Galvanized Steel LE Approved Cable
- Backpack Style Energy Absorber
- Durable Housing
- Rubber Ergonomic Handle
- 360° Swivel Connector
- Provides maximum comfort and safety

The Malta Dynamics' Leading Edge SRLs provide you and your workers with foot level tie-off and sharp edge applications. This compact and lightweight Leading Edge SRL offers a quick-action braking system, swivel top and slide lifeline exit with a rubber ergonomic handle.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs.
- Average Arresting Force: 1,350 lbs.
- Materials: Galvanized & Alloy Steel, Polymer

PART #	HOOK	PACK	WEIGHT
LE3061	Snap	Single	4.21 lbs.
LE3061D	Snap	Dual	7.47 lbs.
LE3063	Rebar	Single	4.21 lbs.
LE3063D	Rebar	Dual	7.47 lbs.



11' PERSONAL LEADING EDGE SRL



KEY FEATURES:

- Galvanized Steel LE Approved Cable
- Backpack Style Energy Absorber
- Durable Housing
- Rubber Ergonomic Handle
- 360° Swivel Connector
- Provides maximum comfort and safety

The Malta Dynamics' Leading Edge SRLs provide you and your workers with foot level tie-off and sharp edge applications. This compact and lightweight Leading Edge SRL offers a quick-action braking system, swivel top and slide lifeline exit with a rubber ergonomic handle.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs.
- Average Arresting Force: 1,350 lbs.
- Materials: Galvanized & Alloy Steel, Polymer





WWW.BANDCIP.COM // 888-276-3386



LEADING EDGE SRL




KEY FEATURES:

- 360° Swivel Top Connection Point
- Built-In-Easy-Carry Handle
- Built-in Strike Test Grip
- Integral Shock Energy Absorption System
- Self-locking Alloy Steel Snap Hook

PART #	LENGTH	WEIGHT
LE7020	20'	9.3 lbs.
LE7030	30'	9.9 lbs.
LE7050	50'	15.6 lbs.

Working with leading edges is daunting and having the proper protection is essential to worker well being. The Malta Dynamics Leading Edge SRL offers dependable performance and features an integral shock absorber to reduce the force on the body if a fall occurs.

PRODUCT SPECIFICATIONS:





■ Materials: Galvanized & Alloy Steel, Polymer






MALTA DYNAMICS OVERHEAD CABLE SRLS

Protect yourself properly with lifelines designed and tested for short stopping distances and low arresting force.

Retracts, yo-yo's, lifelines, SRLs... No matter what you call them, we've got the best in the industry. Count on a durable, well-designed lifeline for every situation.



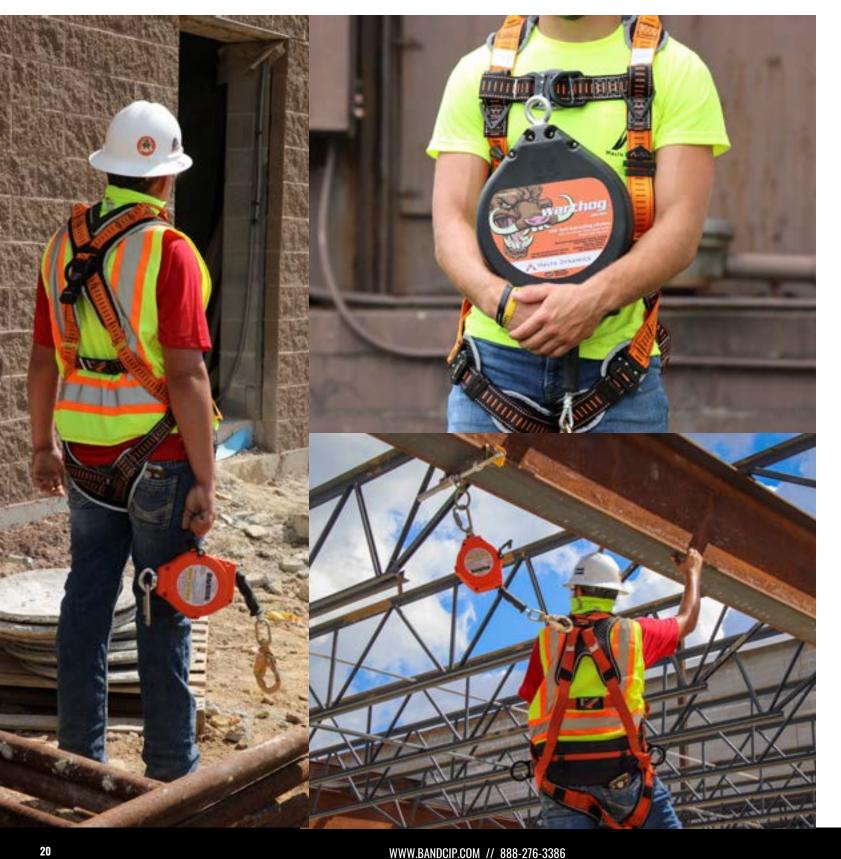

WARTHOG SERIES SRLS

ANSI ANSI 255.14-2014 COMPLIANT

KEY FEATURES:


- 360° Swivel Top Connection Point
- Galvanized Steel Cable
- Built-In Strike Test Grip
- Self-Locking Snap Hook
- Carabiner and Tag Line Included
- Lightweight and Durable Housing
- For Overhead Use Only

PART #	LENGTH	WEIGHT
C7002	50'	14.6 lbs.
C7003	100'	28.8 lbs.

The Malta Dynamics Warthog Series Self-Retracting Lifeline are some of the most durable SRLs available on the market today. The lightweight housing is made from high-strength thermoplastic polymer and features a galvanized steel lifeline cable with a self-locking alloy steel snap hook.

PRODUCT SPECIFICATIONS:





■ Average Arresting Force: 900 lbs.

■ Materials: Galvanized Steel, Alloy Steel, Polymer

RAZORBACK HEAVY-DUTY SRLS



KEY FEATURES:

- 360° Swivel Top
- Built-In-Easy-Carry Handle
- Durable Aluminum Housing
- Galvanized Steel Cable
- Carabiner and Tag Line Included
- For overhead use only
- Convenient Carry Handle

PART #	LENGTH	WEIGHT
C8000	20'	14.9 lbs.
C8001	30'	15.5 lbs.

The Malta Dynamics Razorback™ Heavy-Duty SRL has been engineered to be the TOUGHEST SRL on the market. This is the ultimate work SRL and an impressive piece of equipment to trust your safety to. Built tough with rugged capability, the Razorback™ provides outstanding performance and is the most durable SRL on the market.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lb
- Max. Arresting Distance: Under 54 in
- Average Arresting Force: 900 lbs.
- Materials: Galvanized & Alloy Steel, Aluminum

HYBRID HOG SRLS



KEY FEATURES:

- 360° Swivel Top Connection Point
- Galvanized Steel Cable
- Self-Locking Snap Hook
- Carabiner and Tag Line Included
- Lightweight and Durable Housing
- For Overhead Use Only
- Convenient Carry Handle

PART #	LENGTH	WEIGHT
C9000	20'	11.3 lbs.
C9001	30'	12.1 lbs.

The Malta Dynamics Hybrid Hog is a dual class SRL, engineered with the worker in mind. We've expertly designed one SRL that meets the short stopping distance of Class A AND the more forgiving forces of Class B Lifelines.

- Worker Capacity Range: 130-310
- Max. Arresting Distance:Under 24 in
- Average Arresting Force: 900 lbs.
- Materials: Galvanized & Alloy Steel





Retracts, yo-yo's, lifelines, SRLs... No matter what you call them, we've got the best in the industry. Count on a durable, well-designed lifeline for every situation.



6' PYGMY HOG SRL









- For overhead use only
- Carabiner included
- Lightweight and durable
- Fits in the palm of your hand
- 360° swivel top connector
- Side lifeline exit for smooth payout and retraction

The Pygmy Hog 6' Self-Retracting Lifeline is a Class A Web SRL that is manufactured from non-corrosive, lightweight components and a durable housing. The Pygmy Hog® is built to work as a single unit or in a kit of two with the user wearing both units at once. This highquality equipment is a must-have for your jobsite.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs.
- Max. Arresting Distance: 24 in.
- Average Arresting Force: 900 lbs.
- Materials: Alloy Steel, Polyester, Polymer

ANSI ANSI ANSI ANSI ANSI ANSI ANSI ANSI	
Z359.14-2014	
month and making	



PART #	HOOK	PACK	WEIGHT
C7102	Snap	Single	2.4 lbs.
C7102D	Snap	Dual	5.4 lbs.
C7104	Rebar	Single	3.3 lbs.
C7104D	Rebar	Dual	7.2 lbs.



11' PYGMY HOG SRL







KEY FEATURES:

- For overhead use only
- Carabiner included
- Lightweight and durable
- Fits in the palm of your hand
- 360° swivel top connector
- Side lifeline exit for smooth payout and retraction

The Pygmy Hog 11' Self-Retracting Lifeline is a Class B Web SRL that is manufactured from non-corrosive, lightweight components and a durable housing. The Pygmy Hog® is built to work as a single unit or in a kit of two with the user wearing both units at once. This highquality equipment is a must-have for your jobsite.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs.
- Max. Arresting Distance: 54 in.
- Average Arresting Force: 900 lbs.
- Materials: Alloy Steel, Polyester, Polymer

ANSI A10.32-12	
Z359.14-2014	
ACC MANAGEMENT	



PART #	HOOK	PACK	WEIGHT
C7201	Snap	Single	3.9 lbs.
C7201D	Snap	Dual	8.4 lbs.
C7203	Rebar	Single	4.3 lbs.
C7203D	Rebar	Dual	9.2 lbs.

WWW.BANDCIP.COM // 888-276-3386







MALTA DYNAMICS LANYARDS

Easy to use and inspect, every hook size you need.

Tried and true, shock-absorbing lanyards have been protecting workers from falls for decades. We have lanyards for fall arrest and fall restraint, dual leg, single leg, big hooks, and small hooks. Find the right lanyard for your job below.



6' SINGLE LEG EXTERNAL LANYARD



KEY FEATURES:

- 1" Polyester Webbing
- Clear Shock Pack for Easy Inspection
- Vibrant orange color provides high visibility
- Lightweight and durable

HOOKS

Malta Dynamics 6' Single Leg External Shock Absorbing Lanyard with 2 Steel Snap Hooks meets ANSI Z359.13-2013. The integrated external shock absorbing pack component limits the average arresting force to 900 pounds or less. It is comprised of 1 inch polyester webbing and two (2) steel snap hooks.

PRODUCT SPECIFICATIONS:



■ Gate Strength: 3,600 lbs.

2.5 lbs.

WEIGH'

2.3 lbs.

WEIGH

2.6 lbs.

3.4 lbs.

WWW.BANDCIP.COM // 888-276-3386

■ Materials: Alloy Steel & Polyester



6' SINGLE LEG INTERNAL LANYARD



KEY FEATURES:

C5000 Snap


- 1" Polyester Webbing
- Vibrant orange color provides high visibility
- Lightweight and durable

HOOKS

Snap

Malta Dynamics 6' Single Leg Internal Shock Absorbing Lanyard with 2 Steel Snap Hooks limits average arresting force to 900 pounds or less. It is comprised of 1 inch polyester webbing and two steel snap hooks. The shock absorption is built directly into the lanyard making the internal shock lanyard a particularly lightweight option.

PRODUCT SPECIFICATIONS:



- Gate Strength: 3,600 lbs.
- Materials: Alloy Steel & Polyester



4.5' - 6' SINGLE STETCH LEG LANYARD



KEY FEATURES:

C5004

- Lightweight and durable
- Lanyard stretch helps reduce potential tripping hazards
- Vibrant orange color provides high visibility

HOOKS

Snap

Snap & Rebar

■ 1" polyester web

PART#

C5104

C5115

Malta Dynamics 4.5' – 6' Single Leg Stretch Internal
Shock Absorbing Lanyard with 1 Rebar Hook and 1
Steel Snap Hook is specifically designed to help reduce
the hazards of tripping or catching on nearby machinery
found on many of today's industrial and construction
sites. This lanyard is ideal for work in tight spaces and
around machinery. This lanyard is designed to stretch
from 4.5 feet when at rest out to 6 feet when needed.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Gate Strength: 3,600 lbs.
- Materials: Alloy Steel & Polyester



4.5'- 6' DOUBLE LEG STRETCH LANYARD



KEY FEATURES:

- Lightweight and durable
- Lanyard stretch helps reduce potential tripping hazards
- Vibrant orange color provides high visibility
- 1" polyester web

	PART #	HOOKS	WEIGHT
	C5106	Snap	4.2 lbs.
)	C5117	Snap & Rebar	6 lbs.

Malta Dynamics 4.5' - 6' Double Leg Stretch Internal Shock Absorbing Lanyard with 3 Steel Snap Hooks is specifically designed to help reduce the hazards of tripping or catching on nearby machinery found on many of today's industrial and construction sites. This lanyard is ideal for work in tight spaces and around machinery. This lanyard is designed to stretch from 4.5 feet when at rest out to 6 feet when needed.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Gate Strength: 3,600 lbs.
- Materials: Alloy Steel & Polyester

RESTRAINT LANYARD



KEY FEATURES:

- Adjustable from 4' to 6'
- For Use in Restraint and Positioning Scenarios
- Single Leg Construction
- Vibrant Orange Webbing Provides High Visibility
- 2 Steel Self-Locking Snap Hooks
- UV Resistant 1" Polyester Webbing

12	(ISUA)	PART#	HC
.3	COMPLIANT	C5200	Sr

	PART #	HOOKS	WEIGHT
)	C5200	Snap	2.4 lbs.

When working in environments that require fall restraint or positioning, the Malta Dynamics Restraint Lanyard is the perfect solution. Featuring a single leg construction design, the fall restraint lanyard length easily adapts from 4' to 6'. Use with a full-body harness and restraint anchor.

- Worker Capacity Range: 130-310 lb
- Gate Strength: 3,600 lbs.
- Materials: Polyester, Alloy Steel and Nylon







MALTA DYNAMICS VERTICAL LIFELINE ASSEMBLIES

For fall restraint or fall arrest.

A VLA can be used as part of a personal fall arrest system to bring the worker's body to a safe stop if a fall occurs, but they are also used in fall restraint scenarios to actively limit the distance from an anchor that a worker can reach so that they avoid the fall hazard completely.



VERTICAL LIFELINE ASSEMBLY



KEY FEATURES:

- Built-in Rope Grab
- UV Resistant Materials
- Complete Assembly Includes: Three-Strand White Poly-Rope, Shock Pack, Positioning Device, and 18" Extension Lanyard

The Malta Dynamics Vertical Lifeline Assembly comes complete with a 3-strand polyester rope that is reinforced and resistant to abrasions and heat. Also includes our Fall Arrestor Rope Grab. Kit comes in three



PART#	LENGTH	WEIGHT
C7050	50'	10.6 lbs.
C7051	25'	7.3 lbs.
C7056	100'	19.3 lbs.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.
- Materials: Polyester, Alloy Steel and



VERTICAL LIFELINE W/SNAP HOOK



KEY FEATURES:

- Durable and remains flexible
- Terminated by stitch and plastic casing
- Includes alloy steel snaphook
- UV resistant

C7052

C7053

■ 5/8" Polyester 3-strand rope

25'

50'

4.6 lbs.

WWW.BANDCIP.COM // 888-276-3386

The Malta Dynamics Vertical Lifeline W/Snap Hook is resistant to rot and mildew, alkalis and most solvents. The polyester rope offers protection against abrasion and is heat resistant. It has a melting point of over 300°F. Vertical Lifelines may be used for either fall arrest or for restraint applications.

PRODUCT SPECIFICATIONS:



- Min. Breaking Strength: 5,000 lbs.
- Materials: Polyester, Alloy Steel and 7.8 lbs. Nylon





KEY FEATURES:

- Durable engineering
- Removable rope grabs are easy to install
- Fits 5/8" thick safety rope
- Built-In deceleration pack

The Malta Dynamics Warthog Fall Arrestor Rope Grab is durable and built to last on the jobsite. Connection points made from galvanized steel, the product is easy to install and designed to lock automatically in the event of a fall. Malta Dynamics' Fall Arrestor Rope Grabs are 100% universal.





- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.
- Materials: Galvanized Steel & Nylon





MALTA DYNAMICS CONNECTOR HARDWARE



SRL TAG LINES



KEY FEATURES:

- Easy to use
- Durable Materials
- Compact and lightweight Design

The Malta Dynamics Tag Line is made to attach to a self-retracting lifeline overhead to allow user the ability to pull the snap hook to them, while maintaining the integreity of the lifeline while not in use.

PART #	LENGTH	WEIGH
C0001	30'	lbs
C0002	50'	lbs.

PRODUCT SPECIFICATIONS:

■ Materials: Polyester



18" D-RING EXTENDER




KEY FEATURES:


- Lightweight
- Easy access to D-Ring

The Malta Dynamics D-Ring extension can improve ease of use for fall arrest and fall restraint systems, allowing for quick attachment and release when needed. It is only intended for these two applications and is not suitable for work positioning, suspension or rescue.

PRODUCT SPECIFICATIONS:









REBAR CHAIN ASSEMBLY



KEY FEATURES:

C5010

■ Swivel Rebar Hook for Tangle-Free Connection to Vertical

DIMENSIONS

18" X 2"

- 2.5" Gate Opening on Rebar Hook
- Ideal for Hands-Free Positioning
- Lightweight and Durable
- For Use in Restraint and Work Positioning Applications

24' Link Chain

5.4 lbs.

WWW.BANDCIP.COM // 888-276-3386

The 24" rebar chain assembly is a work positioning device designed to allow workers to perform hands-free work while elevated off the ground. While still being connected to a fall arrest device, the user can attach the snap hooks to the side D-Rings on their harness, attach the rebar hook to the rebar structure, lean away from the wall and begin to work.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Materials: Galvanized Steel



HIGH STRENGTH STEEL LOCKING CARABINER



KEY FEATURES:

- Securely attach lanyards or lifelines to anchorages
- Heavy Duty
- Easy to use one hand operation

GATE OPENING

WEIGH

.58 lbs.

WEIGH

1.7 lbs.

WEIGH

.33 lbs.

The High Strength Steel Locking Carabiner is designed to be durable and easy to use. Its gate is certified to withstand face and side loads up to 3,600 lbs. This carabiner is self-closing and self-locking, and can be opened with just one hand.

PRODUCT SPECIFICATIONS:





■ Materials: Zinc Plated Alloy Steel



TOWER HOOK CARABINER



KEY FEATURES:

- Securely attach lanyards or lifelines to anchorages
- Heavy Duty

C1000 0.84"


■ Easy to use one hand operation


GATE OPENING

■ Includes user installed captive pin

The Tower Hook Carabiner is a larger version of the High Strength Steel Locking Carabiner. It is designed to be durable and easy to use. The wider gate allows for increased versatility

PRODUCT SPECIFICATIONS:





■ Materials Zinc Plated Alloy Steel



DUAL SRL CONNECTOR



KEY FEATURES:


C1002 1.97"

- Attach up to two self-retracting life-
- Maintain 100% Tie-Off
- Easy One-Hand Operation
- Heavy Duty Strength

PART # GATE OPENING


C1004 2.13"

The High Strength Steel Locking Carabiner is designed to be durable and easy to use. The zinc plating on this carabiner helps prolong the life of the connector and prevents rust and corrosion.



- Min. Breaking Strength: 5,000 lbs.
- Materials: Zinc Plated Alloy Steel
- Ividienais. Zinc Plateu Alloy Stee







MALTA DYNAMICS ROOF ANCHORS

Keep Your Team Secure With Malta Dynamics' Roof Anchors

Roof anchors serve as a connecting point for a lifeline. At Malta Dynamics, we offer roof safety anchors that are permanent, reusable and adjustable for installing your system in various environments. Our roof anchor points are also designed for steel, wood, concrete and a diverse range of configurations, allowing you to create a dependable setup regardless of your situation.



PERMANENT ROOF ANCHOR



KEY FEATURES:

■ Exclusive hole layout reduces damage for use on wood rooftops. The anchor is manufactured to truss during install

■ Reliable Stainless D-Ring anchor points struction.

- Lightweight and durable
- Fasteners included (nails)
- Can be installed with screws or nails

WEIGH

.9 lbs.

■ Discreet and low profile design



The Malta Dynamics Reusable Roof Anchor heavy-duty

anchor with two moveable legs and a steel D-Ring. This

fall protection anchor is designed for temporary use on

wood rooftops and fits a range of roof pitches from flat

The Permanent Roof Anchor is designed specifically

to be easy to install and is ideal to place during con-





- Worker Capacity Range: 130-310 lb
- Min. Breaking Strength: 5,000 lbs.
- Materials: Alloy & Stainless Steel



REUSABLE ROOF ANCHOR




KEY FEATURES:

- Pre-drilled hole layout for easy install
- Reliable D-Ring anchor points
- Adjustable pitch to match a variety of rooftops
- Lightweight and durable
- Fasteners Included (Nails)
- Can be installed with screws or nails
- Discreet and low profile design

PART #	DIMENSIONS	WEIGHT
A6303	21" X 3"	2.4 lbs.

PRODUCT SPECIFICATIONS:



The Malta Dynamics Multi-Directional Roof Anchor

restraint. The four directional connection points

reattaching to connection points). Workers can

increase the working range (when detaching and

supports one worker in fall arrest or two workers in fall

- Min. Breaking Strength: 5,000 lbs
- Materials: Galvanized Steel



4-WAY ANCHOR PLATE



KEY FEATURES:

- Easy to Install
- Lightweight
- Versatile 4 Connection Points

DIMENSIONS

12" X 12"

- Supports 1 Worker in Fall Arrest, or 2 Workers in Restraint
- Can be Connected to Wood, Concrete, and Metal

WEIGH

WWW.BANDCIP.COM // 888-276-3386

12.4 lbs.



■ Worker Capacity Range: 130-310 lbs

maintain both fall arrest or fall restraint.

- Min. Breaking Strength: 5,000 lbs.
- Materials: Powder Coated Steel



STANDING SEAM ROOF ANCHOR



KEY FEATURES:

- Designed to be fixed on metal standing seam roofs
- 360° swivel top connection point
- Non-penetrating design; no lasting damage to rooftop
- Removable and resuable
- Lightweight and simple to install with **PRODUCT SPECIFICATIONS:** basic hand tools



PART#	DIMENSIONS	WEIGHT	
A6317	9" × 5.5" × 3"	2.2 lbs.	

The Malta Dynamics Standing Seam Metal Roof Anchor is compact and non-penetrating. It utilizes 8 grub screws that tighten down onto the metal roof seam. The set grub screws pinch tight on the seam to provide a reliable standing seam anchor point.

- Worker Capacity Range: 130-310 lb
- Min. Breaking Strength: 5,000 lbs
- Materials: Aluminum alloy & stain less steel



ROOF ANCHOR STANDARD TOP



■ Durable galvanized finish ■ Great for use with retractable life-

KEY FEATURES:

substrates

lines, vertical lifelines, or rope grab units


■ For use on steel, concrete, or wood

■ Round post works with most off-theshelf flashing kits

PART #	HEIGHT	WEIGHT
A6300	12"	32.7 lbs.
A6301	18"	35.1 lbs.

The Malta Dynamics Standard Roof Anchor is a fixed post roof top anchor, intended for permanent applications. It has been thoroughly tested and is compatible for installation on steel and concrete substrates. The anchor post functions to extend through roofing materials so that it is accessible both during and after roof construction.

PRODUCT SPECIFICATIONS:





■ Materials: Galvanized Steel



ROOF ANCHOR THREADED TOP



KEY FEATURES:


- For use on steel, concrete, or wood substrates
- Durable galvanized finish
- Great for use with retractable lifelines. vertical lifelines, or rope grab units
- Round post works with most off-theshelf flashing kits

PART #	HEIGHT	WEIGHT
A6305	12"	31.8 lbs.
A6306	18"	35.8 lbs.

The Malta Dynamics Threaded Top Roof Anchor is a fixed post rooftop anchor, intended for permanent applications. It has been thoroughly tested and is compatible for installation on steel and concrete substrates. The anchor post functions to extend through roofing materials so that it is accessible both during and after roof construction.

- Worker Capacity Range: 130-310 lb
- Min. Breaking Strength: 5.000 lbs
- Materials: Galvanized Steel





Not every fall hazard takes the same anchor. We have solutions for every commercial or residentail application.



BEAM TROLLEY 3" - 10" 5K



KEY FEATURES:

- Can support one user in fall arrest or fall restraint applications
- Can be used overhead or at foot-level
- Free moving rollers create smooth and safe movement along the I-Beam
- Easily adjustable pins and locking toggles prevent clamp slippag

PART #	BEAM FLANGE Thickness	WEIGHT
A6101	.25" - 8.75"	9.27 lbs.

The Malta Dynamics Trolley Anchor is a top-selling option for users who need a trailing beam anchor device. This beam trolley increases mobility and productivity by saving the time it would take to connect to different anchors as a worker moves around the space. The free moving aluminum rollers are designed to smoothly glide along the I-Beam to follow the movements of the worker while remaining safely connected to the anchor.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.
- Materials: Aluminum & Zinc plated & Stainless steel



BEAM WALKER SUPER SLIDER 3.5" – 14"

ANSI (STA) (



KEY FEATURES:

- 360° centered swivel D-Ring
- Adjustable hooks to custom fit range of flange width
- Adjustment nut and lock nut to secure anchor into position
- Can support one user in fall arrest or fall restraint applications
- Can be used overhead or at foot-leve



PART #	BEAM FLANGE THICKNESS	WEIGHT
A6103	0.25" - 1.25"	3.3 lbs.

easy to use. Adjustable beam walkers are designed for fall protection, rope access, and work positioning. The knurled grip on the adjusting nuts provides guick and secure adjusting.

The Beam Walker Super Slider is light, smooth, and

PRODUCT SPECIFICATIONS:



- Min. Breaking Strength: 5,000 lbs.
- Materials: Aluminum Alloy & Alloy



BEAM WALKER SUPER SLIDER 12" - 30"



KEY FEATURES:

- 360° centered swivel D-Ring
- Adjustable hooks to custom fit range of flange width
- Adjustment nut and lock nut to secure anchor into position
- Can support one user in fall arrest or fall restraint applications
- Can be used overhead or at foot-level

ANSI ANSI OSHA	PART #	BEAM FLANGE THICKNESS	WEIGHT
2359.18-2017 ANSI A10.32-12 COMPLIANT	A6104	.25" to 2.5"	7.2 lbs.

The Beam Walker Super Slider 12" - 30" is a large version fall arrest anchor designed for use on the top flange of a steel I beam. Light, smooth, and easy to use, the Beam Walker Super Slider 12" - 30" is designed for fall protection, rope access and work positioning. The knurled grip on the adjusting nuts provides guick and secure adjusting.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.
- Materials: Aluminum Alloy & Alloy Steel



VERTICAL/FIXED BEAM ANCHOR



KEY FEATURES:


- 360° swivel D-Ring
- Adjustable paw to custom fit range of flange widths
- Adjustment nut and lock nut to secure anchor into position
- Can be used overhead or at foot-level
- Can support one user in fall arrest or fall restraint applications

PART #	BEAM FLANGE THICKNESS	WEIGHT
A6105	.5" to 2"	12.4 lbs.

The Vertical/Fixed Beam anchor can work on I-beams and H-beams. This versatile anchor features a 360-degree swivel D-Ring and accommodates up to a 2" flange thickness. The knurled grip on the adjusting nuts provides quick and secure adjusting.

PRODUCT SPECIFICATIONS:





■ Materials: Aluminum Alloy & Alloy

5K WIRE ROPE SLING



- Durable & easy to use
- Steel thimble eye

KEY FEATURES:

■ Cable resists wear around sharp

LENGTH

.9 lbs.

WEIGH

1.2 lbs.

1.5 lbs.


6'

The 5K Wire Rope Sling is an ANSI Z359 tested anchorage connector with iridescent blue tubing for easier cable inspections. This wire rope sling can be used in a basket configuration. Cable slings are excellent temporary and semi-permanent anchors.

PRODUCT SPECIFICATIONS:







CROSS ARM STRAPS




KEY FEATURES:

PART #

A6350

A6351

A6205



- Malta Dynamics' signature orange color increases visibility
- Increased durability with dual reinforced webbing and heavy duty stitching


LENGTH

4'


6'

The anchorage point can be looped over a steel suppor
beam or structural wood member. Once the small D-
Ring is pulled through the pass-thru loop (the larger D-
Ring), you have an anchor point that is both ANSI tester
and OSHA compliant. The heavy duty wear pad protect
the structural webbing against abrasion helping to in-
crease service life.

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.







MALTA DYNAMICS MULTI-PURPOSE **AND SPECIALITY ANCHORS**



PARAPET ANCHOR



KEY FEATURES:

- Non-penetrating design to eliminate parapet wall damage
- No Installation tools required- Dual
- Rubber protective pads to eliminate damage to the parapet wall
- Reusable



PART #	DIMENSIONS	WEIGHT
A6316	25.5"x14.25"x4"	2.4 lbs.

The Malta Dynamics Parapet clamp system allows you to put your SRL in place with a sturdy connection that helps support weight and keep your workers safe. The reusable device is easy to install and won't cause damtightening handles for even force distribu- age to the wall. Your workers can use our parapet anchor on walls varying in thickness from 2.36" to 14.1".

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs
- Materials: Galvanized Steel



SINGLE USE ROOF ANCHOR



KEY FEATURES:

- Easily bends over peak of roof or lies flat to match roof pitch
- Lightweight and simple to install
- Install using 8, style 16d common nails (not included)
- Removable; no lasting damage to



PART #	DIMENSIONS	WEIGHT
A6318	13" × 3" × 2"	.9 lbs.

The Malta Dynamics Single Use Roof Anchor is a handy addition to the roofer's toolbox. It can be easily bent over the peak of the roof or manipulated to match the pitch of your roof. Because of its versatility and durability, this adjustable pitch anchor creates a reliable tie-off point for your lifeline without causing lasting damage to the rooftop.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.
- Materials: Alloy



CONCRETE ANCHOR STRAPS



KEY FEATURES:

PART#

A6400

A6401

- Increased durability with heavy duty polyester web sheath
- The premium heavy duty sheath protects the inner core against abrasion and wearDiscrete and low profile design

CONNECTOR

Web Only

Steel D-Ring

The Malta Dynamics Concrete Anchor strap can be used as an anchor during building construction such as wood framework, rebar work, or pipe racking. These anchors are cost-effective and durable for multiple locations throughout construction phases.

PRODUCT SPECIFICATIONS:

WEIGH

.6 lbs.

.4 lbs.

WWW.BANDCIP.COM // 888-276-3386

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs.
- Materials: Polyester



5K SWIVEL ANCHOR



KEY FEATURES:

- Simple Mount and Bolt on System
- Easy Installation and Removal
- Swivels Full 360°

The 5K Swivel Anchor can be used on steel flanges. This anchor rotates 360 degrees, flips 180 degrees, and is zinc coated steel. Mounting hardware included.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lb
- Min. Breaking Strength: 5,000 lbs
- Materials: Zinc Coated Steel



TRUSS ANCHOR



KEY FEATURES:

A7320

■ Malta Dynamics' Signature Orange Color Increases Visibility

DIMENSIONS

7" x 4.5" x 2.5"

1.5 lbs.

- Rotating Alloy Steel Attachment Point
- Includes 13 Wood Screws
- For Use on Normal 2"x4" Wooden Truss

DIMENSIONS

8" × 6" × 2"

tion solution for new construction or for work being performed in the attic space of an existing structure. Commonly used by electricians or solar installers, a truss/ attic anchor attaches to existing wood trusses providing a tie-off point in the event of a fall through the ceiling or below levels.

The Malta Dynamics Truss Anchor is a fall protec-

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs
- Min. Breaking Strength: 5,000 lbs
- WEIGHT ■ Materials: Powder Coated Steel & 2.4 lbs. Alloy Steel



BILLBOARD ANCHOR



KEY FEATURES:

A8000

- Custom engineered for billboard use
- Discreet design for permanent installation
- Curved neck allows for anchorage on the front of the billboard without covering the advertisement

DIMENSIONS

BA1000 34" x 24" x 4"

The Malta Dynamics Billboard Anchor has been 3rd party tested to OSHA regulations and is manufactured to attach perfectly to the back of most billboards. It features a curved neck that slightly hangs over the front of the billboard and can be used as a single anchor, or in sets of two anchors to create a horizontal lifeline.

PRODUCT SPECIFICATIONS:

WEIGHT

60 lbs.

- Worker Capacity Range: 130-310 lb
- Min. Breaking Strength: 5,000 lbs
- Materials: Powder Coated Steel







MALTA DYNAMICS BEAM STANCHIONS

Stable and structural supports for horizontal lifelines.

Temporary Horizontal Lifelines are a staple in many areas of construction. These are pre-tested and ready to provide fall protection for hundreds of feet. For long spans or custom configurations call (800)494-1840 to speak with an expert.



TEMPORARY IN-LINE SHOCK ABSORBER



In-line shock absorber - Deploys when a fall occurs to dampen the impact load to MD I-beam or concrete stanchions.





PART#	WIDTH	WEIGHT
P-00039-1	10" × 20" × 5"	9.27 lbs.

MD POST FOR STEEL I-BEAMS



Stanchion post for clamping to steel I-beams – Fits flange thicknesses form 1/2" to $2\ 1/4"$. Fits flange widths from 8" to 22". Can be used as a single tie-off anchor point or as part of an MD Stanchion Post Horizontal Lifeline Fall Protection System.





PART #	DIMENSIONS	WEIGHT
P-00041-1	15" × 20" × 5"	.9 lbs.

MD POST FOR CONCRETE BEAMS



Stanchion post for bolting to concrete or steel beams. Max Flange 1/2" to 12" (steel). Can be used as a single tie-off anchor point or as part of an MD Stanchion Post Horizontal Lifeline Fall Protection System.





PART #	DIMENSIONS	WEIGHT
P-00041-10	15" × 30" × 5"	2.4 lbs.

WWW.BANDCIP.COM // 888-276-3386

HORIZONTAL LIFELINE CABLE ASSEMBLY



Horizontal Lifeline Fall Protection Cable Assembly attaches between either two MD posts for steel I-beams (P-00041-1) or between two MD posts for concrete beams (P-00041-10) to complete a two (2) person horizontal lifeline fall protection system. For temporary use only.



PART#	DIMENSIONS	WEIGHT
P-00147-60	10" × 10" × 5"	12.4 lbs.



INTERMEDIATE BY-PASS ADAPTOR



Intermediate by-pass adapter can be added to any MD post to help workers continue along the horizontal path of the i-beam or concrete beam they are walking on. The unique design keeps the systems horizontal cable in place while still allowing workers enough room to pass the snap hook of their lanyard through the intermediate adapter without ever needing to disconnect from the horizontal lifeline cable system. Additional posts are commonly used in areas where not much clearance exists from where workers are walking on the beams to an obstruction below, typically the ground. Reduces the amount of horizontal cable sag.



PART#	DIMENSIONS	WEIGHT
P-00149-3	5" × 5" × 5"	2.2 lbs.



60' ADJUSTABLE HORIZONTAL LIFELINE SYSTEM



Complete 2 Person 60ft Adjustable Horizontal Lifeline System for workers accessing and performing work from elevated concrete beams or I-beams. Quick and easy set-up. System includes: Two (2) Stanchion Posts (P-00041-10) and One (1) Horizontal Lifeline Fall Protection Cable Assembly (P-00147-60). For temporary use only.



PART #	DIMENSIONS	WEIGHT
MDK-0060-C	15" × 20" × 5"	19.8 lbs.



100' 3-WAY RECOVERY SRL



KEY FEATURES:

- 360° Swivel Top
- Handle for rescue retrieval
- Locking pin for fall arrest & winch
- Galvanized Steel Cable
- Snap hook and impact indicator included

PART#	LENGTH	WEIGHT
R0003	100'	40 lbs.

The Malta Dynamics 100' 3-Way Recovery Self-Retracting Lifeline is built to be easy to handle, adjust, and install, it is both durable and dependable. With a quick-activating retrieval mechanism for emergency evacuation, you can expect superior performance and reliability. This block allows the fall to arrest and then easy hoisting of the worker with the help of its built-in winch mechanism.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lbs.
- Average Arresting Force: 900 lbs.
- Max. Arresting Distance: Under 54 in
- Materials: Alloy & Galvanized Steel and High-Strength Polymer



115' MATERIAL HANDLING WINCH



KEY FEATURES:

- Locking Pin Secures Winch in Place on Bracket
- Rotating Handle for Continued Winch-
- Sturdy Design for Smooth Cable Control
- Super Durability
- Self-locking Snap Hook Included





PART#	WEIGHT
R0007	42.8 lbs.

Our standard winch is designed for personnel riding, material handling, rescue, and evacuation. It includes a 115-foot galvanized steel cable that can support a worker load from 130-310 lbs. The winch offers the ability to raise or lower a worker to safety or lock them in place. Once installed, the winch cable is fed through the head of the tripod and placed on the built-in pulley wheel.

PRODUCT SPECIFICATIONS:

- Max. Working Load: 300 lbs
- Materials: Galvanized Steel

SUSPENSION TRAUMA RELIEF STRAP




KEY FEATURES:


- Wider Strap Accommodates Work Boots and Helps Ideal Foot Placement
- Quick Connect for Fast and Easy Use
- Compact and Lightweight
- Pre-Adjustable and Ready to Use Immediately
- Does Not Hinder the Activity of Worker

PART #	DIMENSIONS	WEIGHT
R0005	9" × 2" × 2"	.9 lbs.

The Suspension Trauma Relief Strap is a premium trauma strap designed to reduce the forces effects of prolonged fall suspension. The newly designed Malta Dynamics suspension trauma relief strap can be attached to most full body harness makes and models available on the market today.

PRODUCT SPECIFICATIONS:







3-WAY RECOVERY SRL BRACKET




KEY FEATURES:

- Connected Locking Pin
- Pre-cut Slot for Rescue/Retrieval Winch
- Durable Unibody Design
- Anchors Rescue/Retrieval Winch Securely to Tripod

Use in conjunction with the 100' 3-Way SRL (R0003) for attachment on our Tripod. This adds fall arrest and a secondary retrieval option.









TRIPOD



KEY FEATURES:

- Lightweight Aluminum Alloy
- Non-slip Hinged Feet
- Adjustable Leg Safety Chains
- Built-in Pulley and Eye Bolt
- Easily Portable Using Included Bag
- Head Locking Detent Balls
- Telescopic Legs for Adjustable Height

PART #	WEIGHT
R0006	75 lbs.

Our 'Groundhog' confined space rescue tripod is easy and quick to assemble with aluminum telescoping legs. It's designed to work with material or personnel and can be equipped with our 100' 3-way rescue SRL. Our tripods and accessories provide safe access and emergency rescue for confined spaces.

PRODUCT SPECIFICATIONS:

- Worker Capacity Range: 130-310 lb
- Min. Breaking Strength: 5,000 lbs.
- Materials: Aluminum Alloy

WWW.BANDCIP.COM // 888-276-3386





The aluminum alloy tripod is built to support one worker up to 310 s. Our tripod with optional winch is designed for safe access and emergency rescue n confined spaces including sewers, wells, underground pipe, and tunnels.



MALTA DYNAMICS SAFETY HELMETS

Provide the ultimate head protection.

Protect your head from more than just falling objects. Lightweight, versatile, and tested for impact from front, back, side, and top, with a chin strap to keep your head protecting you from secondary impacts in an accident. Bulk discounts and custom logos are available.

COLOR

Blue

Black

Grey

Green

Orange

Red

White

Blue

Black

Grey

Green

Orange

Red

White

Blue

Black

Grey

Green

Orange

Red

White

VISOR

N/A

N/A

N/A

N/A

N/A

N/A

N/A

Clear

Clear

Clear

Clear

Clear

Clear

Clear

Tinted

Tinted

Tinted

Tinted

Tinted

Tinted

Tinted

WEIGH

1.1 lbs.

1.3 lbs.

PART#

HTB1100

HTBL1100

HTG1100

HT01100

HTR1100

HTW1100

HTY1100

HTB1101

HTBL1101

HTG1101

HT01101

HTR1101

HTW1101

HTY1101

HTB1102

HTBL1102

HTG1102

HT01102

HTR1102

HTW1102

HTY1102



TYPE 2 SAFETY HELMET











WWW.BANDCIP.COM // 888-276-3386

The Malta Dynamics Type 2 Safety Helmets meet the ANSI standard Z89.1-2014 for Type 2 Class C Helmets. This means they're rated for impact to the top of your head as well as impact to the front, sides, and back of the head.


KEY FEATURES:

- Adjustable chin strap
- Comfort adjustable head band

PRODUCT SPECIFICATIONS:

■ Materials: ABS





TYPE 1 SAFETY HELMET









The Malta Dynamics Type 1 Safety Helmets meet the ANSI standard Z89.1-2014 for Type 1 Class C Helmets. This means they're rated for impact to the top of your head.

KEY FEATURES:

- Adjustable chin strap
- Comfort adjustable head band



■ Materials: ABS









Our hard hats are made in the USA and available in cap-style or full brim in 7 colors. Customizable with your company logo, bulk discounts are available

KEY FEATURES:



CAP STYLE HARD HATS



PART #	SIZE	WEIGHT
HHB1004	Blue	.7 lbs.
HH01004	Orange	.7 lbs.
HHR1004	Red	.7 lbs.
HHW1004	White	.7 lbs.
HHY1004	Yellow	.7 lbs.

The Malta Dynamics Cap Style Hard Hat is a standard cap style hard hat with 4-point ratchet suspension and accessory slots. The 4-point ratchet nylon suspensions are built with replaceable brow pads.

PRODUCT SPECIFICATIONS:

- Fits hat size 6.5-8
- Materials: Polyethylene



FULL BRIM HARD HATS





PART #	COLOR	WEIGHT
HHB2004	Blue	.9 lbs.
HHBLK2004	Black	.9 lbs.
HHG2004	Grey	.9 lbs.
HHGR2004	Green	.9 lbs.
HH02004	Orange	.9 lbs.
HHR2004	Red	.9 lbs.
HHW2004	White	.9 lbs.
HHY2004	Yellow	.9 lbs.

The Malta Dynamics Full Brim Hard Hat is a standard hard hat with full brim to protect you from the elements. The 4-point ratchet nylon suspensions are built with replaceable brow pads.

KEY FEATURES:

Innovative suspension bends at flexible points for a better fit

PRODUCT SPECIFICATIONS:

- Fits hat size 6.5-8
- Materials: Polyethylene



FULL BRIM YELLOW HARD HAT W/VISOR



KEY FEATURES:

- Hard Hat Ratchet suspension ensures fast, easy size adjustments
- Equipped with cushion pillows and nape cushion for a snug, comfortable fit
- Durable face shield resists impact, chemicals, shattering, and high tempera-
- Discrete and low profile design

HHY2004-HH312B-HHE840ME

that is designed to give full protection for both your head and face at the same time. Includes a 4 Pt. Ratchet Full Brim Style Hard Hat, and a full face visor with a bracket for attachment to the hard hat.

Malta Dynamics has put together a hard hat visor kit

PRODUCT SPECIFICATIONS:

■ Fits hat size 6.5-8

WEIGHT

3 lbs.


WWW.BANDCIP.COM // 888-276-3386

- Hat Material: Polyethylene
- Visor Material: Polyester
- Bracket Material: Nylon



HARD HAT VISORS





appropriate visor and ANSI approved eye wear for complete OSHA compliance

PART#	MATERIAL	WEIGHT
HHE840ME	Polyester	.24 lbs.
HH840T	Tritan	.23 lbs.
HH840M	Acetate	.24 lbs.

The Malta Dynamics line of Hard Hat Mounted Face Protection is designed specifically as an accessory to the Malta Dynamics' Hard Hat line. When job site applications demand both head and face protection our wide variety of products are compliant, safe, and durable. The Malta Dynamics flat acetate visor is to be used in conjunction with the Malta Dynamics brand face shield brackets to protect against light

chemical splashes and impacts.



■ Dimensions: 8" x 15"

HARD HAT BRACKETS



KEY FEATURES:

- Perfect to enhance your comfort and
- Visor headgear or a hard hat visor carrier must be worn with the appropriate visor and ANSI approved eye wear for complete OSHA compliance


PART#	COMPATIBLE	WEIGHT
HH300B	Cap Style	.2 lbs.
HH312B	Full Brim	.2 lbs.
HH400D	Cap Style	.13 lbs.

The Malta Dynamics line of Hard Hat Mounted Face Protection is designed specifically as an accessory to the Malta Dynamics' Hard Hat line. When job site applications demand both head and face protection our wide variety of products are compliant, safe, and durable. The Malta Dynamics flat acetate visor is to be used in conjunction with the Malta Dynamics brand face shield

brackets to protect against light chemical splashes and impacts.

PRODUCT SPECIFICATIONS:

■ Material: Nylon

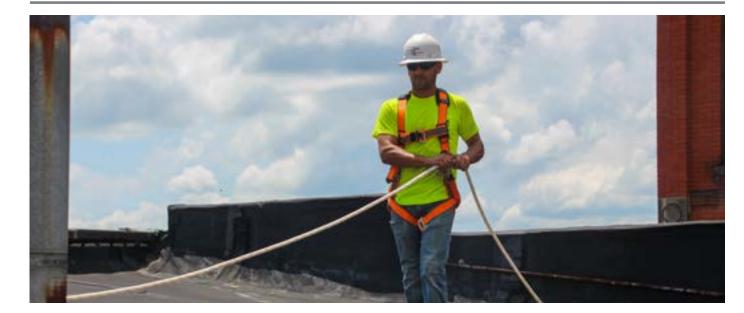




Safety glasses are required on virtually every construction or industrial site. Find value and comfort in our ever-growing line of safety glasses.



CLEAR FRAME SAFETY GLASSES







- Molded nose bridge
- Rimless lenses for easy cleaning

Malta Dynamics Clear Frame Safety Glasses consist of a lightweight, rimless design that provides all day user comfort. Thin, flexible temples provide a secure fit without uncomfortable pressure points.







PRODUCT SPECIFICATIONS:

■ Materials: Polycarbonate



TINTED FRAME SAFETY GLASSES

KEY FEATURES:

- Medium impact
- Scratch-Resistant
- 99.9% UV protection
- Molded nose bridge
- Rimless lenses for easy cleaning

Malta Dynamics Tinted Frame Safety Glasses consist of a lightweight, rimless design that provides all day user comfort. Thin, flexible temples provide a secure fit without uncomfortable pressure points. These safety glasses are tinted and provide 99% UV resistance.





PART #	PACK	WEIGHT
SG1112	12	.06 lbs. per pair

PRODUCT SPECIFICATIONS:

■ Materials: Polycarbonate

SAFETY GLASSES W/SIDE PROTECTION

KEY FEATURES:

- Anti-slip flexible temple tips
- Anti-scratch lenses
- Side lenses for added safety
- Easy-clean rimless design
- Molded nose bridge design creates universal fit
- Fits over most prescription glasses
- FDA registered

Malta Dynamics Safety Protective Glasses with Side Sheilds are FDA registered, and ANSI impact rated. The lightweight and comfortable style of these goggles, make them perfect for wearing with or without prescription glasses underneath, and are a cost-effective eye protection solution for applications like medical, lab work, chemistry, woodworking, mechanics, construction and more.





PART#	PACK	WEIGHT
SG1013-12	12	.2 lbs. per pair

PRODUCT SPECIFICATIONS:

■ Materials: Strengthen PC



KEY FEATURES:

- Anti-slip flexible temple tips
- Easy to clean design featuring top
- Durable anti-scratch coating
- Anti-fog lenses

PART #

■ Universal fit molded nose bridge

PACK

■ Lightweight & comfortable

Malta Dynamics APEX Safety Glasses are ANSI impact rated to meet the ANSI/ISEA Z87.1-2020 standard. They feature a stylish modern design with curved lenses that contour to the shape of the eye and face for a superior fit and added protection. The large lenses give a full, clear view of surroundings while providing lightweight and comfortable eye protection.

PRODUCT SPECIFICATIONS: .06 lbs.

WEIGH1

1 lbs.

.06 lbs.

1 lbs.

.06 lbs.

1 lbs.

- Lens Material: Polycarbonate
- Frame Materials: Plastic & Rubber













APEX INDOOR/OUTDOOR SAFETY GLASSES



Protect yourself and be seen with our PPE. From basic to stylish and always a great value, our Fall Protection products aren't the only Field Tested, Field Approved safety products we have.



HI-VIS SAFETY LONG SLEEVE SHIRT



KEY FEATURES:

■ Left Chest Pocket

PART #	SIZE	WEIGH
SHL0011	s	.4 lbs
SHL0012	М	.4 lbs
SHL0013	L	.4 lbs
SHL0014	XL	.4 lbs
SHL0015	2XL	.4 lbs
SHL0016	3XL	.4 lbs

Be seen and be cool. Our hi-vis shirts are 100% polyester breathable mesh and resistant to shrinkage. The included pocket is a great place for us to put your company logo. Discounts are available for bulk orders.

PRODUCT SPECIFICATIONS:

- High Visibility Fluorescent Yellow
- Materials: 100% Polyester



HI-VIS SAFETY SHORT SLEEVE SHIRT



KEY FEATURES:

■ Left Chest Pocket

PART #	SIZE	WEIGHT
SHS0011	S	.4 lbs.
SHS0012	М	.4 lbs.
SHS0013	L	.4 lbs.
SHS0014	XL	.4 lbs.
SHS0015	2XL	.4 lbs.
SHS0016	3XL	.4 lbs.

Be seen and be cool. Our hi-vis shirts are 100% polyester breathable mesh and resistant to shrinkage. The included pocket is a great place for us to put your company logo. Discounts are available for bulk orders.

PRODUCT SPECIFICATIONS:

- High Visibility Fluorescent Yellow
- Materials: 100% Polyester



HI-VIS SAFETY SURVEYOR VEST



■ ANSI Class 2 Hi-Vis

KEY FEATURES:

■ Zipper Front Closure

PART #	SIZE	WEIGHT
PPE-006	М	.6 lbs.
PPE-007	L	.6 lbs.
PPE-008	XL	.6 lbs.
PPE-009	2XL	.6 lbs.
PPE-010	3XL	.6 lbs.
PPE-011	4XL	.6 lbs.

■ Ultra-Cool Breathable Mesh Design

Be seen in all conditions with our premium Surveyor Vest. It's got 7 pockets, straps for radios, and a zipper enclosure. Have us add your company logo, bulk discounts available.

PRODUCT SPECIFICATIONS:

- High Visibility Fluorescent Yellow
- Reflective Strips

WWW.BANDCIP.COM // 888-276-3386

■ Materials: 100% Polyester



HI-VIS FIELD VEST



KEY FEATURES:

- Zipper Front Closure
- Ultra-Cool Breathable Mesh Design
- ANSI Class 2 Hi-Vis

n Design	ets and a zipper enclosure. Have us add your company logo, bulk discounts available.	
WEIGHT		

PART# SIZE V1501 М .3 lbs. V1502 .3 lbs. V1503 .3 lbs. XL V1504 2XL .3 lbs. V1505 3XL .3 lbs.

PRODUCT SPECIFICATIONS:

- High Visibility Fluorescent Yellov
- Reflective Strips
- Materials: 100% Polyester



THIN WORK GLOVES



KEY FEATURES:

- ANSI Cut Level 5
- Polyurethane palm coating maintains dexterity while delivering an excellent grip

gloves are critical to maintaining safety in any work environment. Malta Dynamics made the work gloves that our crews asked for.

Comfortable, lightweight and durable cut resistant

Be seen in all conditions with our Field Vest. It's made

of breathable mesh with reflective stripes and 2 pock-

Ask your rep for a sample!

PART #	SIZE	WEIGHT
G6001	М	.2 lbs.
G6002	L	.2 lbs.
G6003	XL	.2 lbs.

PRODUCT SPECIFICATIONS:

- Coating: Polyurethane
- Shell Color: High Vis Yellow



THICK WORK GLOVES



KEY FEATURES:

- ANSI Cut Level 4
- Polyurethane palm coating maintains dexterity while delivering an excellent grip


Comfortable, warm and durable cut resistant gloves are critical to maintaining safety in cold weather Malta Dynamics made the work gloves that our crews asked for.

Ask your rep for a sample!

	PART#	SIZE	WEIGHT
	G7001	М	.4 lbs.
	G7002	L	.4 lbs.
r	G7003	XL	.4 lbs.

- Coating: Polyurethane
- Shell Color: Black





MALTA DYNAMICS PPE

Stand out and be safe with our Hi-Vis clothing.

MALTA DYNAMICS COOLER/BAGS

Our ever-growing Personal Protective Equipment offering.



CORDED EARPLUGS



KEY FEATURES:

- Disposable Earplugs
- Individually Wrapped
- Includes Plastic Case

PACK

Malta Dynamics' Corded Earplugs are crafted with durable silicone to enhance your comfort and provide a solid fit when working on construction sites or near loud equipment. Each reusable earplug offers hearing protection up to NRR=25dB to block out harmful sounds commonly found on jobsites. This pack of 100 includes individually-wrapped corded earplugs and a convenient plastic carrying case.

PRODUCT SPECIFICATIONS:

- Hearing Protection up to NRR=25dE
- Materials: Silicone



DISPOSABLE EARPLUGS

48



KEY FEATURES:

PPE-012 100

- Disposable Earplugs
- Individually Wrapped

PACK

PPE-013 200

Malta Dynamics' Uncorded Earplugs feature a lightweight design that includes a PU foam structure for added comfort. With hearing protection up to NRR=33dB, these uncorded earplugs are perfect for construction sites and maintenance areas where workers are exposed to loud equipment. Each pair of uncorded earplugs are individually wrapped and can be disposed of easily after use.

PRODUCT SPECIFICATIONS:

WEIGHT .2 lbs.

WEIGHT

.2 lbs.

- Hearing Protection up to NRR=33dE
- Materials: PU foam





COOLER BAG



KEY FEATURES:

- Double Decker zipper
- Exterior Zipper Pocket
- Padded Carry handles
- Shoulder Strap
- Premium multi-layer insulation
- Welded seam leak-proof liner

Malta Dynamics' soft cooler is tough enough for the job site with tough a leak-proof interior liner. The insulation is guaranteed to keep your multi-layer contents cold for days. The carry handles and shoulder straps also make it easy to take wherever you need. These coolers are customizable with your company logo as well.



PART#	DIMENSIONS	WEIGHT	
CL0001	24"x11"x15"	2.7 lbs.	

PRODUCT SPECIFICATIONS:

■ Materials: 600 D Nylon



EQUIPMENT PRO BAG



KEY FEATURES:

■ Fits Safety Gear for 1 Worker

The Malta Dynamics Equipment Pro Bag makes it easy to tote your gear to and from the jobsite. It's designed for easy access to equipment and personal items. Two top handles as well as a shoulder strap keep it comfortable for carrying.



PART #	DIMENSIONS	WEIGHT
K1001	16" x 11.5"x 11.5"	.6 lbs.

PRODUCT SPECIFICATIONS:

■ Materials: 100% Polyester



EQUIPMENT DUFFLE BAG



KEY FEATURES:

K1002


- Hydroshield water-resistant base will
- Adjustable shoulder strap


DIMENSIONS

18" x 10" x 10"

The Malta Dynamics Equipment Duffle Bag is perfect for harnesses, lanyards or other small fall protection protect your stuff from a wet field or gym equipment, this carry bag keeps your equipment mobile. The Equipment Bag has two convenient carry handles and a shoulder strap.











MALTA DYNAMICS GUARDRAIL/KITS

Putting the right gear together for your crew

GUARDRAIL



KEY FEATURES:

- Compatible with 2×4 construction grade lumber for top-rail, midrail, and toe- from falling. When disassembled, the posts can be easboard installation
- Secure posts to jobsite edge with 11 Screws (fasteners not included)
- Posts are removable and reusable
- Posts can be installed up to 8' apart

- 1 osto can be instance up to 6 apart				
PART #	PACK	WEIGHT	PRODUCT SPECIFICATIONS:	
TR1000	1	6.1 lbs.	■ Worker Capacity Range: 130-310 lbs.	
TR1000-5	5	30.5 lbs.	■ Materials: Carbon Steel	



SAFETY KITS

Our fall protection kits are meant to give you the highest quality solutions at the most affordable price. We have convenient, pre-made, all-purpose kits for roofers, personal fall arrest systems and horizontal lifelines that include everything you need for most general applications—all in one container or carry bag. You can build your own personal fall protection or roofer's kit by choosing the harness and connector sizes and models that meet your needs. Assembling your personal fall protection system and keeping your workers safe has never been easier or more affordable.







The Malta Dynamics Temporary Guardrail System is a

user-friendly and lightweight solution to prevent workers

ily stacked and transported by hand. The OSHA Compliant Temporary Guardrail Posts are easy to configure

around the leading edges in your workspace and can be

placed to suit unique jobsite applications. Perfect

for use on wood or concrete.

Contact us at esales@bandcip or (888) 276-3386 to build your own custom Kit.



WORK CONFIDENTLY AT HEIGHTS




At Malta Dynamics, our mission is for everyone to come home safe at the end of the work day. Fall protection systems alone do not guarantee safety for your workers. How you use the equipment and train with the systems also matters.

We have developed several resources for you and your team so you can work confidently at heights. From fall protection plans that you can customize for your crew to instructions and tips related specifically to our products, we have you covered.

Browse and download our free resources below — and shop our online store or call us at (866) 916-3203 for all your fall protection and safety gear needs.







SAFETY PLAN TEMPLATES

WEBINARS

VIDEOS



INFOGRAPHICS




POSTERS



INSPECTION FORMS



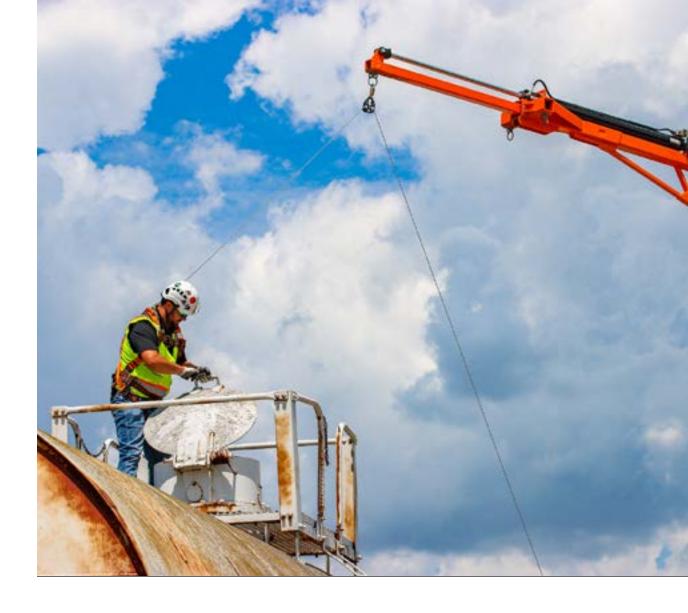

SITE www.bandcip.com

CONTACT

Phone: 888-276-3386 Mail: esales@bandcip.com

FIELD TESTED FIELD APPROVED